
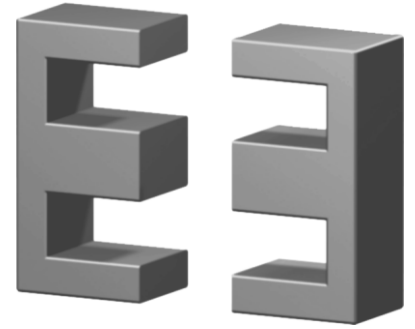


Dimension: (UNIT:mm)

A	46.9 ± 0.8
B	19.6 ± 0.2
C	15.6 ± 0.25
D	12.1Min
E	31.75Min
F	15.6±0.25
G	
H	

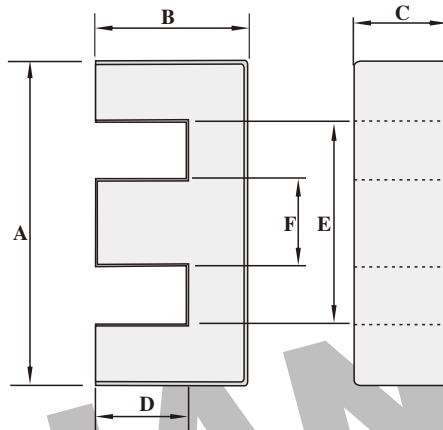

Test conditions

AL: F=1.0KHz U=0.3V N=10Ts

Effective parameter

C1(mm) ¹	Ae(mm ²)	Le(mm)	Ve(mm ³)	Weight(g)
0.380	234	88.9	20800	≈53

Core halves

AL measured in combination with a non-gapped core half, clamping force for Al measurements, 40+/-20N unless otherwise stated.

Core halves of high permeability grades. Clamping force for Al measurements, 40+/-20N

Grade	AL (nH)	μe	AIR GAP μm	Type number
P3	100 ± 5%	≈ 30	≈ 5080	EE47-P3
	160 ± 5%	≈ 48	≈ 2720	EE47-P3
	250 ± 5%	≈ 76	≈ 1540	EE47-P3
	315 ± 5%	≈ 95	≈ 1160	EE47-P3
	400 ± 8%	≈ 121	≈ 860	EE47-P3
	630 ± 10%	≈ 190	≈ 490	EE47-P3
	5500 ± 25%	≈ 1660	≈ 0	EE47-P3
P4	5600 ± 25%	≈ 1690	≈ 0	EE47-P4
HQ2K	100 ± 5%	≈ 30	≈ 5320	EE47-HQ2K
	160 ± 5%	≈ 48	≈ 2800	EE47-HQ2K
	250 ± 5%	≈ 76	≈ 1540	EE47-HQ2K
	315 ± 5%	≈ 95	≈ 1160	EE47-HQ2K
	400 ± 8%	≈ 121	≈ 850	EE47-HQ2K
	630 ± 10%	≈ 190	≈ 490	EE47-HQ2K
	5100 ± 25%	≈ 1540	≈ 0	EE47-HQ2K

Grade	AL (nH)	μe	AIR GAP μm	Type number
H7K	11475 ± 25%	≈ 3470	≈ 0	EE47-H7K

Properties of core sets under power conditions

Grade	B (mT) at	Core loss (w) at			
	H=250 A/m F=25KHz T=100℃	F=25 KHz B=200mT T=100℃	f=100 KHz B=100mT T=100℃	F=100 KHz B=200mT T=100℃	F=400 KHz B=50mT T=100℃
P3	≥320	≤2.3	≤2.7	-	-
P4	≥320	-	≤2.1	≤11	-
HQ2K	≥320	-	≤2.5	-	≤4.0

Note:

- 1: Document is the property of FUAN Inc & is not allow to be duplicated without authorization
- 2: RoHS compliant.