



P3 **T16*9.5*8** **C/P**
Material **Core Size** **Coating**
 材质 品名 涂装

C=Epoxy. P=Parylene.

Ferrite core


Dimensions: (UNIT:mm)

Dimensions(mm)			Wt(g/set)
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	3.95
16.0±0.40	9.50±0.30	8.00±0.30	
16.90max	8.60 min	8.90 max	

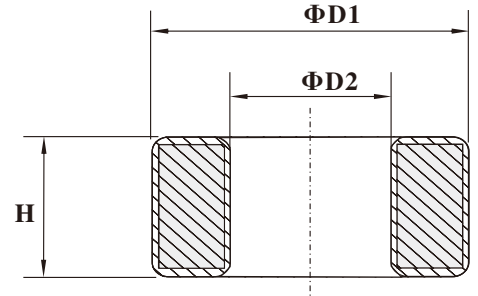

Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

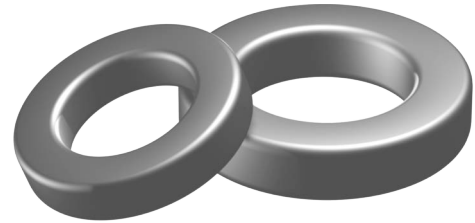

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	1019	26.0	39.2

Coating


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	2000±25%	≈2300	T16/9.5/8/P3
H5K	4200±25%	≈5000	T16/9.5/8/H5K
H7K	5850±25%	≈7000	T16/9.5/8/H7K
H10K	8350±30%	≈10000	T16/9.5/8/H10K

Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K

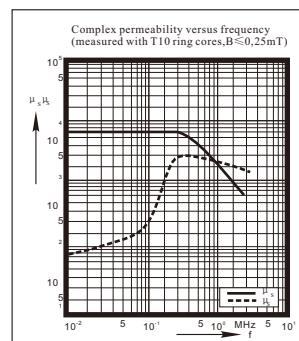

H7K



H10K