
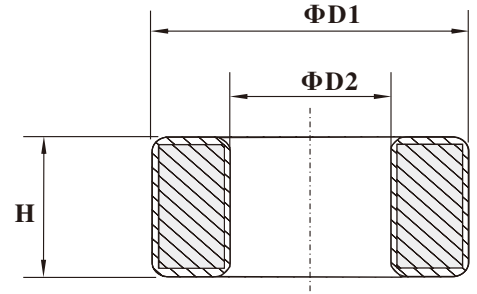


**P3**      **T25\*15\*12.7**      **C/P**  
**Material**    **Core Size**    **Coating**  
 材质            品名            涂装

C=Epoxy.    P=Parylene.


**Dimensions: (UNIT:mm)**

Dimensions(mm)			
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	Wt(g/set)
25.0±0.40	15.0±0.40	12.7±0.40	19.50
26.0max	14.0min	13.6max	



**Test Conditions**

AL: F=10.0KHz    U=0.3V    N=10Ts

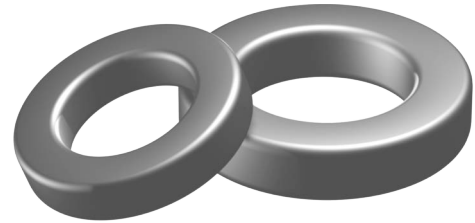

**Effective parameter**

	Ve(mm <sup>3</sup> )	Ae(mm <sup>2</sup> )	Le(mm)
	3740	62.1	60.2

**Coating**


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

**Ring core data**


GRADE	AL(nH)	μi	TYPE NUMBER
P3	3150±25%	≈2300	T25/15/12.7/P3
H5K	6500±25%	≈5000	T25/15/12.7/H5K
H7K	9100±25%	≈7000	T25/15/12.7/H7K
H10K	13000±30%	≈10000	T25/15/12.7/H10K

**Note:**


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K



H10K