



P3 **T48*30*15** **C/P**
Material **Core Size** **Coating**
 材质 品名 涂装

C=Epoxy. P=Parylene.

Ferrite core


Dimensions: (UNIT:mm)

Dimensions(mm)			Wt(g/set)
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	75.4
48.0±0.50	30.0±0.50	15.0 ±0.40	
49.4max	28.6min	16.00max	

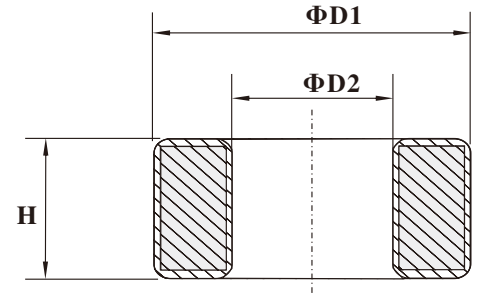

Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

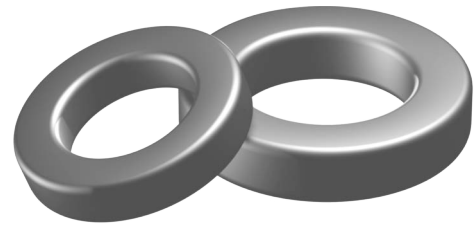

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	15700	133	118

Coating


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	3400±25%	≈2300	T48/30/15/P3
H5K	7050±25%	≈5000	T48/30/15/H5K
H7K	9900±25%	≈7000	T48/30/15/H7K
H10K	14000±30%	≈10000	T48/30/15/H10K

Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K



H10K