


3.2W EI38/13.6 FAPE3813 SERIES

FEATURES

Two compartments bobbin
Self-extinguishing plastics UL94V-0
Degree of protection IP67
Weight: 0.155kg
Temperature class to 70 °C/B

Design complies with the following certifications:

	UL5085-1
	UL5085-3
	CSA-C22.2-66.1-06
	CSA-C22.2-66.3-06

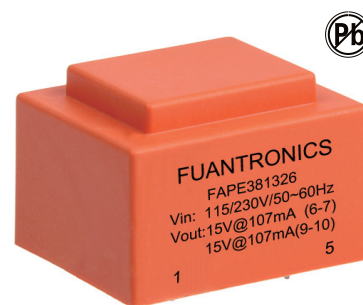


COMMON APPLICATIONS

Medical equipments
Industrial equipments
Industrial controls
Test equipments
Industrial computers
Avionics & telecom


OPTIONS

Bulk packaging is standard
Custom design available

PHYSICAL CHARACTERISTICS

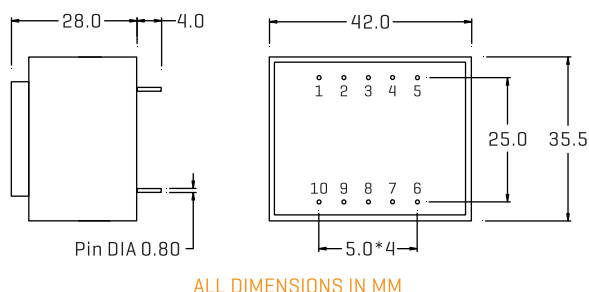

TECHNICAL INFORMATION

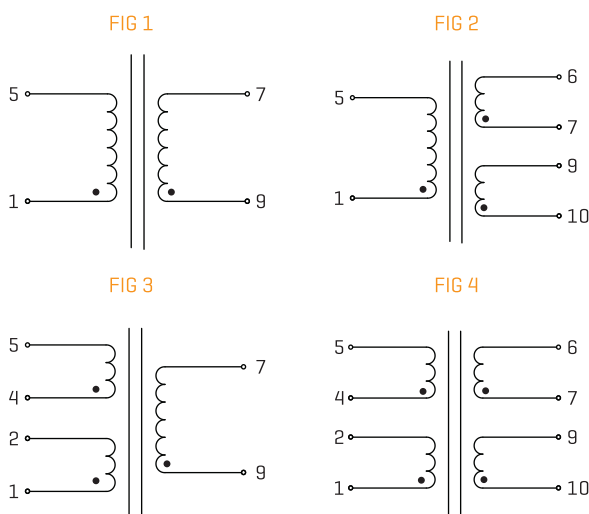

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE381393	230	6/533	8.0	1
FAPE381394	230	9/356	12.0	1
FAPE381395	230	12/267	16.0	1
FAPE381396	230	15/214	20.0	1
FAPE381397	230	18/178	24.1	1
FAPE381398	230	24/134	32.1	1
FAPE381399	230	2*6/267	2*8.0	2
FAPE3813100	230	2*9/178	2*12.0	2
FAPE3813101	230	2*12/134	2*16.0	2
FAPE3813102	230	2*15/107	2*20.0	2
FAPE3813103	230	2*18/89	2*24.1	2
FAPE3813104	230	2*24/67	2*32.1	2
FAPE3813105	115	6/533	8.0	1
FAPE3813106	115	9/356	12.0	1
FAPE3813107	115	12/267	16.0	1
FAPE3813108	115	15/214	20.0	1
FAPE3813109	115	18/178	24.1	1
FAPE3813110	115	24/134	32.1	1
FAPE3813111	115	2*6/267	2*8.0	2
FAPE3813112	115	2*9/178	2*12.0	2
FAPE3813113	115	2*12/134	2*16.0	2
FAPE3813114	115	2*15/107	2*20.0	2
FAPE3813115	115	2*18/89	2*24.1	2
FAPE3813116	115	2*24/67	2*32.1	2
FAPE3813117	2*115	6/533	8.0	3
FAPE3813118	2*115	9/356	12.0	3
FAPE3813119	2*115	12/267	16.0	3
FAPE3813120	2*115	15/214	20.0	3
FAPE3813121	2*115	18/178	24.1	3
FAPE3813122	2*115	24/134	32.1	3
FAPE3813123	2*115	2*6/267	2*8.0	4
FAPE3813124	2*115	2*9/178	2*12.0	4
FAPE3813125	2*115	2*12/134	2*16.0	4
FAPE3813126	2*115	2*15/107	2*20.0	4
FAPE3813127	2*115	2*18/89	2*24.1	4
FAPE3813128	2*115	2*24/67	2*32.1	4